

1

2

3

PART NO. AND CH. CODE	△ W ₁ ±0.4	△ W ₂ ±0.4	△ H ₁	△ H ₂	X	A	B	WIRE SIZE
△ 7116-4025 () (7B16-4025)	2.30	5.20	(2.19)	(4.21)	0.50	12.50	3.00	AVS 0.3~AVS 0.5 EQUIVALENT
△ 7116-4026 () (7B16-4026)	3.00	5.30	(2.91)	(4.08)	0.80	12.50	3.00	AVS 0.5~AVS 1.25 EQUIVALENT
△ 7116-4027 () (7B16-4027)	4.20	6.00	(4.06)	(5.09)	1.00	13.00	2.00	AVSS 2 EQUIVALENT




注記

- △ 1. () 内品番は、エアバック回路及び
特別管理回路に使用する時に適用すること。
- △ 2. 適用ゴム製品番： 7158-3006-90 ETC.
- △ 3. 嵌合スターミナル： 7114-4025 ETC. (7B14-4025 ETC.)


NOTES

- △ 1. PART NUMBERS IN PARENTHESIS SHALL BE USED FOR
AIR BAG (A/B) CIRCUITS AND OTHER CIRCUITS
DESIGNATED FOR SPECIAL MONITORING.
- △ 2. APPLICABLE RUBBER STOPPER NO. : 7158-3006-90 ETC.
- △ 3. MATING MALE TERMINAL : 7114-4025 ETC. (7B14-4025 ETC.)

C/A

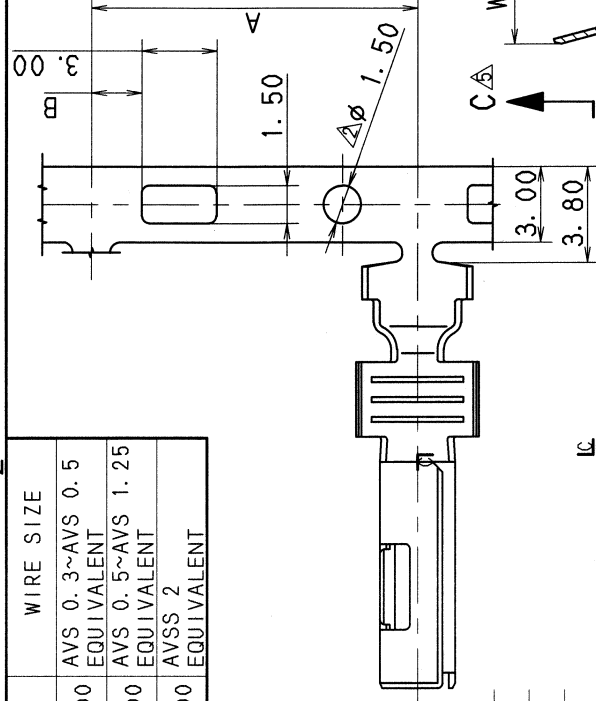


SEC. A-A

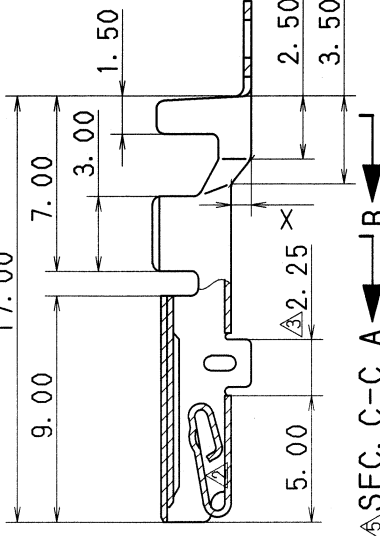

SEC. B-B

SEC. C-C A ← B



△	05/11/10	CHANGED PART NAME ETC.	C05-ZF20	T. O
△	00/11/08	CHANGED FORM & DIMENSION	C00-M342	Y. S
△	98/07/14	ADDED DIMENSION	C97-N456	H. K
△	97/05/26	CHANGED FORM & ADDED A/B PART NO. ()	C97-L981	S. S
△	96/01/09	CHANGED DIMENSION	C95-M905	T. M
△	88/07/18	NEW	8MC-0809	Y. S
LET	DATE	REVISION RECORD	NO.	CHKD
GENERAL TOLERANCE				
	10MAX	50MAX	100MAX	250MAX
A	±0.15	±0.2	±0.3	±0.5
B	±0.2	±0.3	±0.55	±0.95
C	±0.3	±0.5	±0.8	±1.4
SPECIFIED			MASS	g

CUSTOMER	CUSTOMER PART NO.	CUSTOMER DWG NO.	CUSTOMER DWG NO.
OFFICE	TRIAL PART NO.		
VENDOR			
VENDOR NO.			
DWG TYPE	DWG SOURCE	DWG DATE	UNIT
R	NEW	88/07/12	m
APPROVED	CHECKED	CHECKED	DESIGN
小島	田口	星	M. TSUJI
05/11/25	05/11/24	05/11/23	05/11/10

ISSUE MARK			
MATL. SPEC.	COPPER ALLOY (t=0.25)	TREAT. & FIN.	TIN PLATING
NAME	2. 3Ⅱ SEALED TERMINAL		

FEMALE			
PART NO.	7116-4025 ETC. (7B16-4025 ETC.)		
CH. CODE	A		
DWG NO.	7116-4025:R	SET DWG NO.	
YAZAKI CORPORATION			

1

2

3