

Digital Visual Standard 外观检查标准



76746

Digital Visual Standard

外观检查标准

<u>REV</u> 修改 次数	<u>DATE</u> 日期	<u>DESCRIPTION OF CHANGES</u> 状态描述	<u>REVISED BY</u> 修订人	<u>REVIEWED / APPROVED BY</u> 审核人
A	2/25/16	Initial Creation 首次创建	TONY YANG	MIKE LU
B	9/7/2018	Updates for POQ Factory	P. Pan	P. Gao
C	08/22/2022	Updates for page 9	WT liu	Paddy Pan

Approved By	Name	Date
Engineer		
Production		
Quality		

LITTLE FLASH

ACCEPT

小的飞边OK

The THICKNESS of the below line = 1.5 mm

1.5mm  1.5 mm

上面这条线的宽度为1.5mm



LITTLE FLASH

ACCEPT

图示飞边OK



DVS 76746-外观检查标准



EXCESS FLASH IN MEMBRANE

REJECT

图示飞边，需除去

PLEX CODE: EXCESS FLASH -多余飞边






**CHECK “DATE STAMP
PLUG” MUST BE SET ON
CURRENT MONTH**

检查日期章必须设定在
当前月

OPEN BLISTER REJECT

开口的气疤/撕裂，不
良品

PLEX CODE: BLISTER-气疤

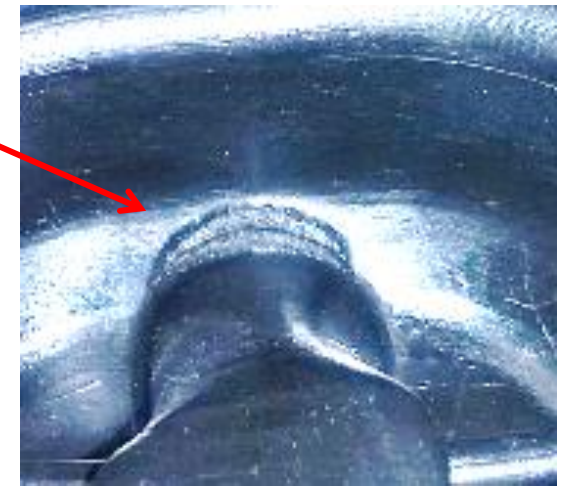



OPEN BLISTER REJECT


开口的气疤/撕裂，不
良品

PLEX CODE: BLISTER

LITTLE BLISTER OK

小气疤 OK



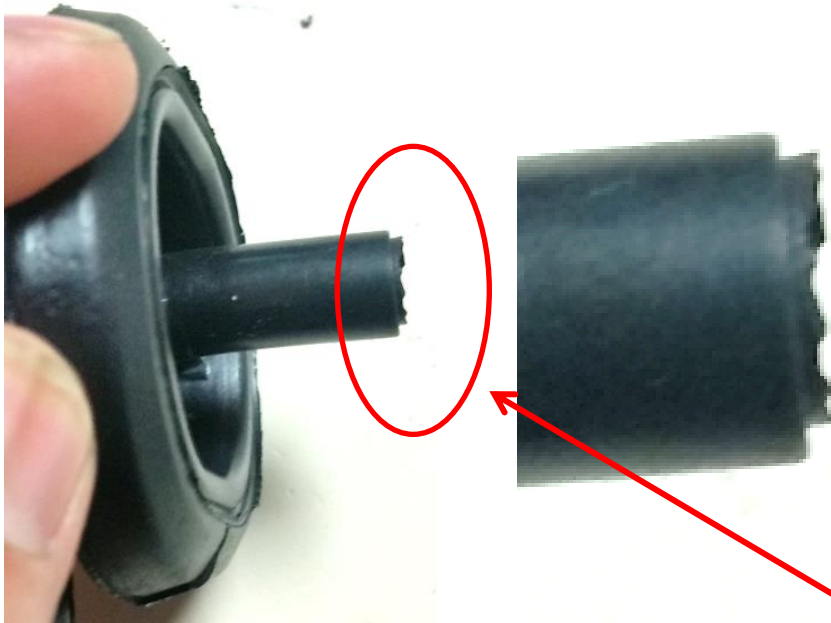

INCOMPLETE SEAL

REJECT

缺料，未完全成型，
不良品

PLEX CODE: Underfill-缺胶





CRACK, REJECT

裂口，不合格

PLEX CODE: TORN/TEARS-撕裂

**GOOD LUBE
APPLICATION**

好的涂油



DVS 76746-外观检查标准



SMALL DEFORMATION/NON-FILL ON
1ST OR 2ND SEAL RIB ACCEPTABLE,
BUT ONE RIB HAS TO BE DEFECT
FREE

第一道或第二道密封圈变
形、缺胶，OK。必须保证
有一道密封圈是没有缺陷
的

FLASH BEAD IN SEAL AREA
MUST BE REMOVED

密封区域柱状的飞边
必须去除

PLEX CODE: FLASH IN SEAL-密封区
域飞边

