

DPN: 35091062
 Material: CUNISI
 Surface: SN
 Material Thickness: 0.20 mm
 Cross Section [mm²]: 0.35 | 0.50

Strip Length: 4.00 mm
 Cable Type: FLRY-B

**Uncontrolled
Copy**
 For Information only!

Isolation Range Φ [mm]: 1.20-1.60
 Seal :


Cable type	Arrangement	Struct. nxd [mm]	Insul. diam [mm]	Tear-out force [N]	CCH [mm]	CCH tol. [±mm]	CCW [mm]	CCW tol. [±mm]	ICH [mm]	ICH tol. [±mm]	ICW [mm]	ICW tol. [±mm]
FLRY-B 0.35		12x0.21	1.30	50	0.85	+ 0.03 - 0.03	1.45	+ 0.05 - 0.05	1.70	+ 0.10 - 0.10	1.85	+ 0.10 - 0.10
FLRY-B 0.50		16x0.21	1.50	80	0.95	+ 0.03 - 0.03	1.45	+ 0.10 - 0.10	1.80	+ 0.10 - 0.10	1.90	+ 0.10 - 0.10

Core:
 C-1.40-3.0-6
 DPN 10713745

Isolation:
 IS-1.80-3.0-6
 DPN 10764052

Anvil:

Two piece anvil:
 AC-1.40-3.25
 DPN 10807124
 AI-1.80-3.2-0.0
 DPN 10806722

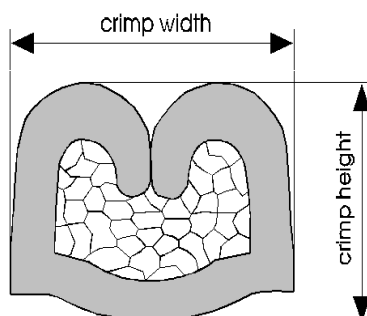

DPN: 35091062



Cable:
FLRY-B 0.35mm² = 12x0.21 mm

Crimp height:
0.85 mm

Crimp width:
1.45 mm



Cable:
FLRY-B 0.50mm² = 16x0.21 mm

Crimp height:
0.95 mm

Crimp width:
1.45 mm