

SO FORD



SO FORD



Mechanical & Abrasion Protection
Compression resistance



Convoluted Tubing




Slit or Non Slit



**Polypropylene
Polyester**



Standard: Black
Option: Stripe. Other colors upon request.



Low: -40°C (-40°F)
High: 150°C (302°F)




Conform to Ford Specifications
Compression resistance

PHYSICAL PROPERTIES

Physical properties	Spec	PPSD (PP)	PPMS (PP)	TPEE2 (Thermoplastic Copolyester)
Thermal properties				
Long term aging (3000h)	-	100°C	125°C	150°C
Short term aging (240h)	-	125°C	150°C	175°C
Other properties				
Density (g/cm ³)	ISO 1183	0.90	0.91	1.26
Flammability (mm/min)	FMVSS 302	< 100	< 100	< 100
Chemical resistance	Resists the majority of chemicals and automotive fluids			

DIMENSIONS

Designation	ID A Ø (mm)	OD B Ø (mm)
SOFORD 04.5	4.65	7.1
SOFORD 06	6.65	9.65
SOFORD 07.5	7.4	10.2
SOFORD 08.5	8.6	11.7
SOFORD 10	9.1	12.8
SOFORD 12	11.6	15.4
SOFORD 13	13	17.25
SOFORD 14	14.3	18.6
SOFORD 16	15.2	19.5
SOFORD 17	16.5	20.9
SOFORD 19	19.5	23.8
SOFORD 22	22.1	27
SOFORD 23	23.5	28.75
SOFORD 26	25.8	31.8
SOFORD 29	29.3	36.15
SOFORD 32	32.05	39.65

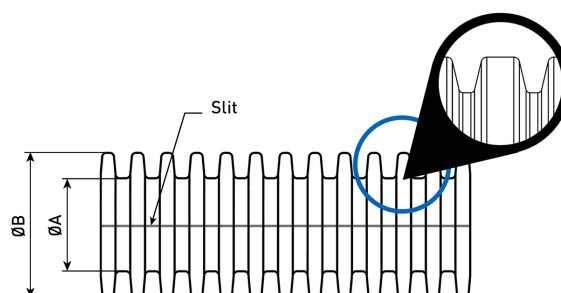

PACKAGING

Containers
Half-containers
Coils
Cut lengths from 15 to 2,000 mm
(Other lengths upon request only)

sales@delfingen.com • www.delfingen.com