

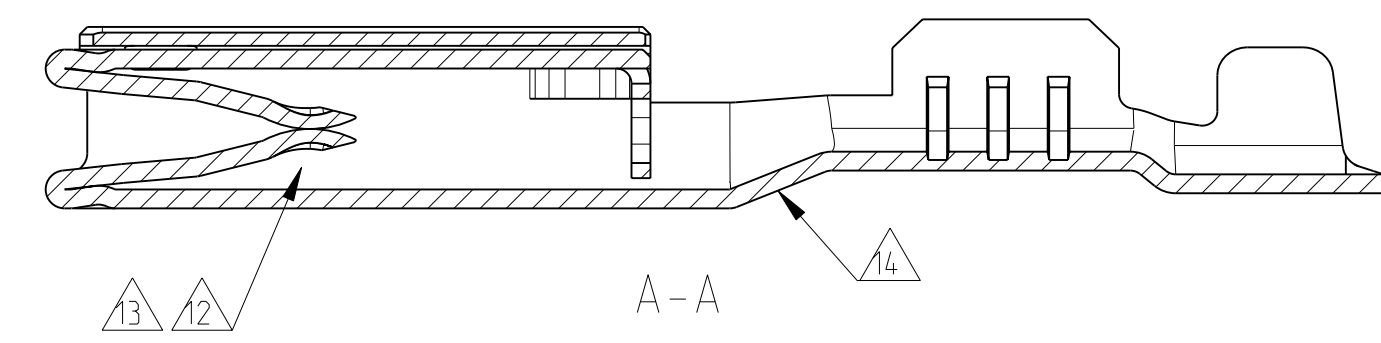


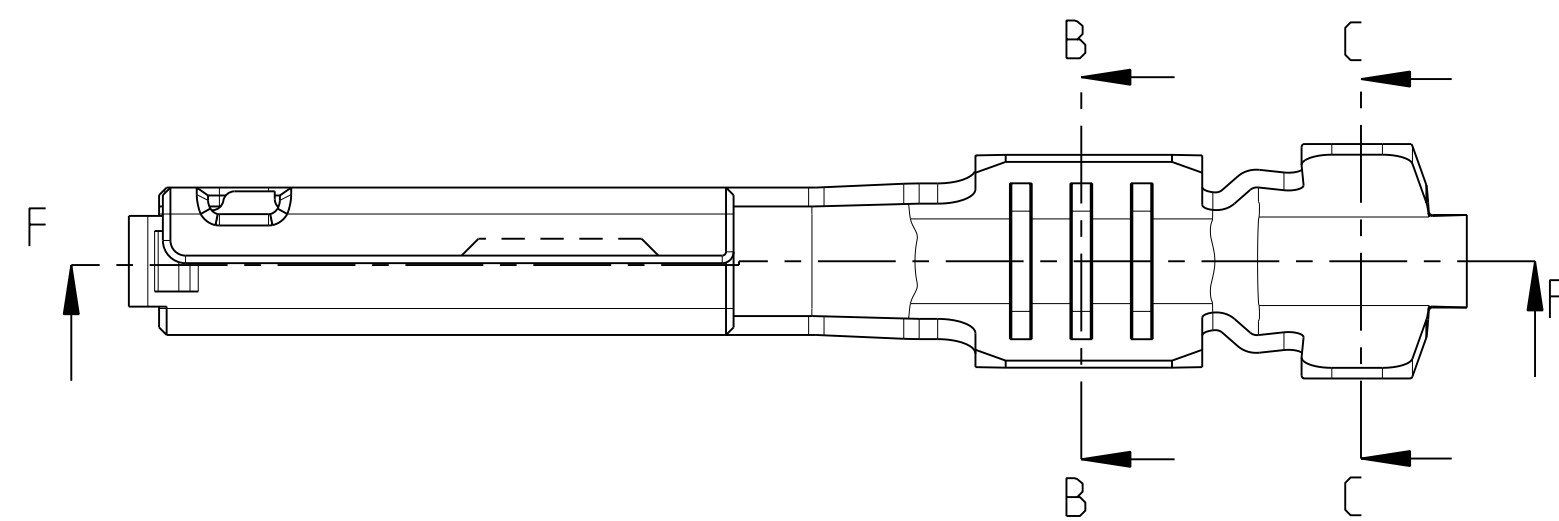

PART NO.	PART-REV.	PLATING SPECIFICATION	WEIGHT	CONDUCTOR WIRE SIZE	DIMENSIONS				CONDUCTOR CRIMP INFO	INSULATION CRIMP INFO	MATERIAL TYPE
					A1	A2	R1	R2			
0-1393364-1	A	GOLD PLATING 	0.22g	0.22	2.11	2.4	0.45	0.6	A	SEE TE Connectivity SPEC 114-13060	CuNi35SiMg DIN 1777
0-1393364-2		GOLD PLATING 		AWG 22	2.11	2.4	0.45	0.6	A		
				0.35	2.11	2.4	0.45	0.6	A		
0-1393367-2	A	SILVER PLATING 	0.22g	0.22	2.11	2.4	0.45	0.6	A		
		AWG 22		2.11	2.4	0.45	0.6	A			
		0.35		2.11	2.4	0.45	0.6	A			
0-1393367-1	B	TIN PLATING	0.22g	0.22	2.11	2.4	0.45	0.6	A		
		AWG 22		2.11	2.4	0.45	0.6	A			
		0.35		2.11	2.4	0.45	0.6	A			
0-1393365-1	A	GOLD PLATING 	0.22g	AWG 20	2.8	3.1	0.6	0.2	B		
		2.8		3.1	0.6	0.2	B				
0.50		2.8		3.1	0.6	0.2	B				
0-1393365-2	A	GOLD PLATING 	0.22g	AWG 18	2.8	3.1	0.6	0.2	B		
		2.8		3.1	0.6	0.2	B				
0.75		2.8		3.1	0.6	0.2	B				
0-1393366-2	A	SILVER PLATING 	0.22g	AWG 20	2.8	3.1	0.6	0.2	B		
				2.8	3.1	0.6	0.2	B			
		0.50		2.8	3.1	0.6	0.2	B			
		AWG 18		2.8	3.1	0.6	0.2	B			
		0.75		2.8	3.1	0.6	0.2	B			
0-1393366-1	B	TIN PLATING	0.22g	AWG 20	2.8	3.1	0.6	0.2	B		
				2.8	3.1	0.6	0.2	B			
		0.50		2.8	3.1	0.6	0.2	B			
		AWG 18		2.8	3.1	0.6	0.2	B			
		0.75		2.8	3.1	0.6	0.2	B			

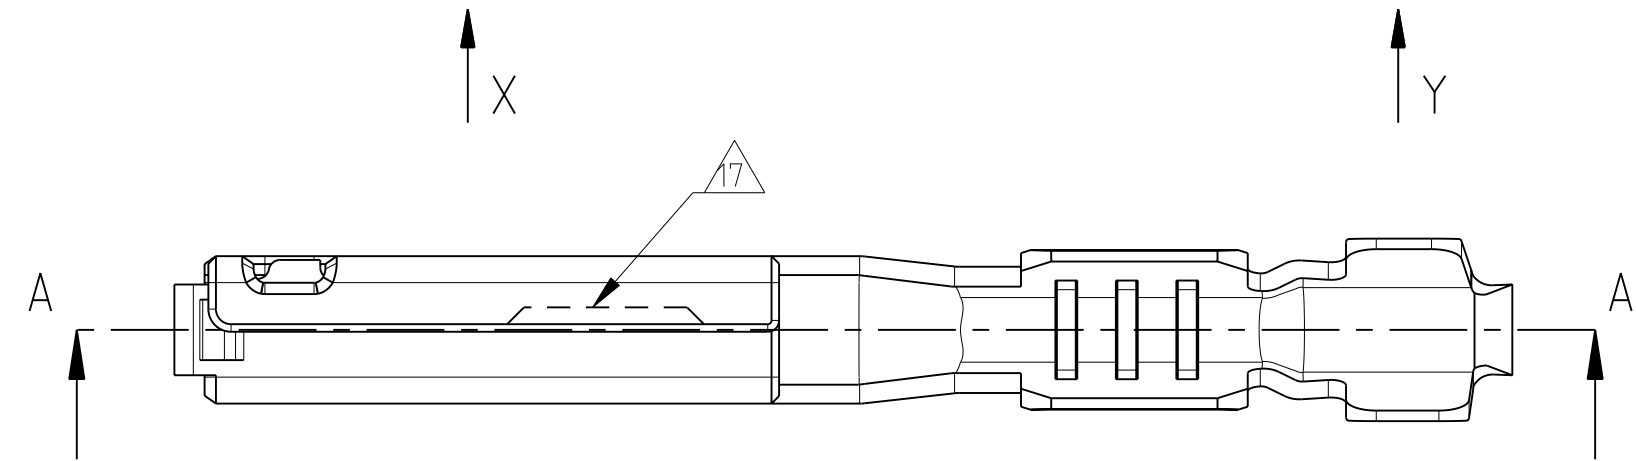


GOLD - VERSION

NOTES:

- 1 MATERIAL: COPPER ALLOY. MATERIAL THICKNESS $t=0.25\pm0.01$
- 2 MUST BE FREE OF CRACKS AND BURRS THAT AFFECT FUNCTIONS.
- 3 WHEN A TIN/GOLD PLATED TERMINAL IS USED ON THE MALE SIDE THEN THE CORRESPONDING PLATING (TIN OR GOLD) MUST BE USED ON THE FEMALE TERMINAL.
- 4 -
- 5 0.2 mm MAX RADIUS PERMISSIBLE ON EDGES AND FILLETS SHOWN AS SHARP FOR STAMPING PARTS.
- 6 -
- 7 LUBRICATION: OPTIMOL
- 8 THE WIDTH OF THE TRANSITION (INDICATED AREA) MAY NOT EXCEED 2.0MM
- 9 TE CONNECTIVITY-CRIMP SPECIFICATION: 114-13060
- 10 Au FLASH STRIPE ALL ROUND TO IDENTIFICATE Au VERSION
- 11 GOLD PLATING ($\geq 0.38 \mu\text{m Au}$) FOR GOLD SHORTING BAR APPLICATIONS VALID FOR 1393364-2 AND 1393365-2 ONLY
- 12 SILVER PLATING $3-5 \mu\text{m}$ (CONTACT AREA ONLY)
- 13 TARNISH FOR SILVER VERSION
- 14 SILVER FLASH
- 15 SILVER MARKING
- 16 ALTERNATE LOGO "TE" OR "I" IS ALLOWED
- 17 OPTIONAL NOTCH DESIGN ALLOWED
- 18 FOR SILVER PLATING; TARNISH IS ACCEPTABLE. ELECTRICAL PERFORMANCE IS NOT AFFECTED BY TARNISH ON ANY OF THE SILVER PLATED SURFACES OF THE TERMINAL

REELING DIRECTIONS FOR REFERENCE ONLY

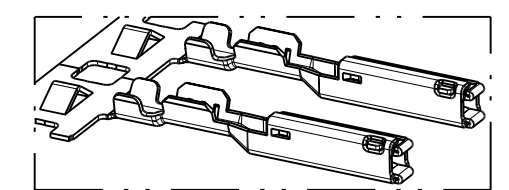

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG 05FEB01 B. VAN SEBROECK CHK 05FEB01 G. STEINBACH APVD 05FEB01 G. MUMFORD		 TE Connectivity	
DIMENSIONS: (mm)		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 P/LC ± 1 P/LC ± 2 P/LC ± 3 P/LC ± 4 P/LC ± 5 P/LC ±		NAME GET FEMALE TERMINAL GET BUCHSEN KONTAKT	
		PRODUCT SPEC - APPLICATION SPEC 114-13060		SIZE A 1	
MATERIAL -		FINISH -		CAGE CODE C=1393364	
WEIGHT SEE TABLE		RESTRICTED TO -		SCALE 10:1	
CUSTOMER DRAWING		SHEET 1 of 1		REV. B5	