

# Crimp - Validation

APN: 15326426  
 Material: CU-ALLOY  
 Surface: AU  
 Material Thickness: 0.30 mm  
 Cross Section [mm<sup>2</sup>]: 0.35

Strip Length: 4.60 mm  
 Cable Type: FLRY-A

**Uncontrolled  
Copy**  
For Information only!

Isolation Range  $\Phi$ [mm]: 1.20-1.40  
 Seal : 15324974


Cable type	Seal APN	Struct. nxd [mm]	Insul. diam [mm]	Tear-out force [N]	<b>CCH [mm]</b>	CCH tol. [ $\pm$ mm]	<b>CCW [mm]</b>	CCW tol. [ $\pm$ mm]	<b>ICH [mm]</b>	ICH tol. [ $\pm$ mm]	<b>ICW [mm]</b>	ICW tol. [ $\pm$ mm]
FLRY-A 0.35	15324974	7x0.26	1.30	50	1.05	+ 0.03 - 0.03	1.90	+ 0.05 - 0.05	3.20	+ 0.10 - 0.10	3.70	+ 0.10 - 0.10

Core:  
 C-1.85-4.0-12  
 APN 10713712

Isolation:  
 IS-008  
 APN 10714462

Anvil:

Two piece anvil:  
 AC-1.85-4.25  
 APN 10764087  
 AI-3.50-4.6-1.0  
 APN 10805969

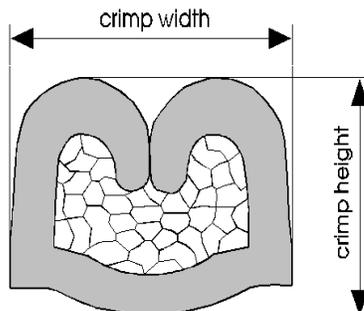

APN: 15326426



Cable:  
FLRY-A 0.35mm<sup>2</sup> = 7x0.26 mm

Crimp height:  
1.05 mm

Crimp width:  
1.90 mm