

8

7

6

5

4

3

2

1

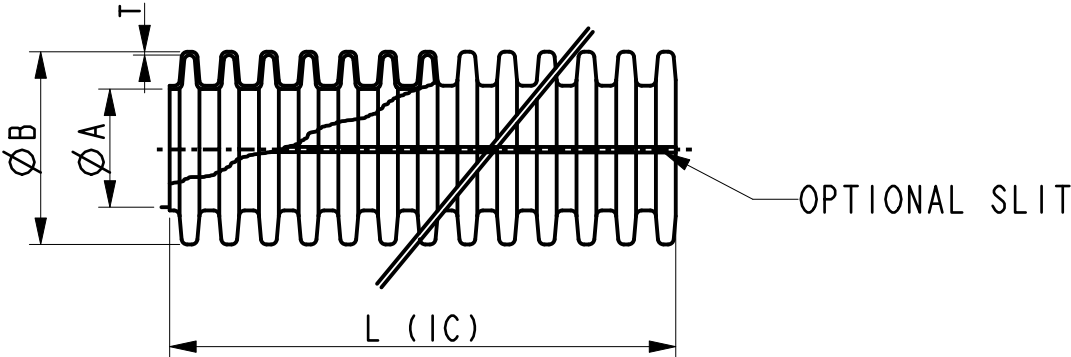
DESCRIPTION	DELFINGEN GENERIC PN*				NOMINAL Ø (mm)	INNER Ø A (mm)	EXTERNAL Ø B (mm)	THICKNESS T (mm)
	Black (BKGN)		Orange (ORNO)					
	SLIT	UNSLIT	SLIT	UNSLIT				
CV/CVNS PPSD (COLOR) Ø04.5 FRD	62057	62074	-	-	4.5	4.65 ± 0.30	7.10 ± 0.20	≥ 0.17
CV/CVNS PPSD (COLOR) Ø06 FRD	62058	62075	-	-	6.0	6.65 ± 0.30	9.65 ± 0.20	≥ 0.17
CV/CVNS PPSD (COLOR) Ø07.5 FRD	62059	62076	-	-	7.5	7.40 ± 0.40	10.20 ± 0.40	≥ 0.17
CV/CVNS PPSD (COLOR) Ø08.5 FRD	62060	62077	-	-	8.5	8.60 ± 0.40	11.70 ± 0.40	≥ 0.17
CV/CVNS PPSD (COLOR) Ø10 FRD	62062	62078	-	-	10	9.10 ± 0.40	12.80 ± 0.40	≥ 0.17
CV/CVNS PPSD (COLOR) Ø12 FRD	62063	62079	-	-	12	11.60 ± 0.40	15.40 ± 0.40	≥ 0.17
CV/CVNS PPSD (COLOR) Ø13 FRD	62064	62081	-	161901	13	13.00 ± 0.40	17.25 ± 0.40	≥ 0.17
CV/CVNS PPSD (COLOR) Ø14 FRD	62065	62082	-	-	14	14.30 ± 0.40	18.60 ± 0.40	≥ 0.17
CV/CVNS PPSD (COLOR) Ø16 FRD	62066	62083	-	-	16	15.20 ± 0.40	19.50 ± 0.40	≥ 0.17
CV/CVNS PPSD (COLOR) Ø17 FRD	62067	62084	-	-	17	16.50 ± 0.50	20.90 ± 0.50	≥ 0.17
CV/CVNS PPSD (COLOR) Ø19 FRD	62068	62085	-	-	19	19.50 ± 0.50	23.80 ± 0.50	≥ 0.17
CV/CVNS PPSD (COLOR) Ø22 FRD	62069	62086	-	-	22	22.10 ± 0.50	27.00 ± 0.50	≥ 0.20
CV/CVNS PPSD (COLOR) Ø23 FRD	62070	62087	-	-	23	23.50 ± 0.50	28.75 ± 0.50	≥ 0.20
CV/CVNS PPSD (COLOR) Ø26 FRD	62072	62088	-	-	26	25.80 ± 0.50	31.80 ± 0.50	≥ 0.25
CV/CVNS PPSD (COLOR) Ø29 FRD	62073	62089	-	-	29	29.30 ± 0.60	36.15 ± 0.50	≥ 0.25
CV/CVNS PPSD (COLOR) Ø32 FRD	65025	66563	-	-	32	32.05 ± 0.60	39.65 ± 0.50	≥ 0.25

STANDARD CUTTING TOLERANCES	
LENGTH (mm) (I.C.)	TOLERANCES (mm)
15 --> 79	+/- 2
80 --> 179	+/- 3
180 --> 319	+/- 5
320 --> 499	+/- 7
500 --> 749	+/- 10
750 --> 1199	+/- 15
1200 --> 2000	+/- 20
> 2000	+/- 2%

Ø	TOP RIB CUTTING TOLERANCES L (I.C.)
4.5	- 0 / +(2,1 mm + 1% part length)
6	- 0 / +(2,7 mm + 1% part length)
7.5	- 0 / +(2,7 mm + 1% part length)
8.5	- 0 / +(2,3 mm + 1% part length)
10	- 0 / +(3,1 mm + 1% part length)
12	- 0 / +(3,1 mm + 1% part length)
13	- 0 / +(3,3 mm + 1% part length)
14	- 0 / +(3,5 mm + 1% part length)
16	- 0 / +(3,5 mm + 1% part length)
17	- 0 / +(3,5 mm + 1% part length)
19	- 0 / +(3,5 mm + 1% part length)
22	- 0 / +(4,0 mm + 1% part length)
23	- 0 / +(4,7 mm + 1% part length)
26	- 0 / +(4,7 mm + 1% part length)
29	- 0 / +(5,1 mm + 1% part length)
32	- 0 / +(5,6 mm + 1% part length)
- 0 mm /+ (1 step of tubing + 1% of the length) (length rounded to the superior quantify number)	

DELFINGEN DESIGNATION
CV/CVNS PPSD (COLOR) (NOMINAL Ø)X(CUT LENGTH IN 4 DIGITS) (CUTTING TOLERANCE) FRD

MATERIAL PROPERTIES	
MATERIAL	PPSD
COLOR	BLACK (BK--) ORANGE (OR__)
STRIPE	GREEN (--GN) NO STRIPE (__NO)
SERVICE T°	100°C
PEAK T°	125°C





NOTES :

Cutting shape : Standard cut or top rib cut

* Generic part number without packaging

I.C. Important characteristics

B	23/NOV/23	Added orange color as standard		ACH	HBO
A	03/MAR/23	Drawing creation		ACH	CCA
INDICE	DATE	REVISION DESCRIPTIONS		DESIGNED	APPROVED
Manager: -		Drawing Type: CONTROL			Units: mm
Project: -		Material: SEE TABLE			Scale: -
DPN: -		General Tolerances: SEE TABLE		CAD software: CREO 5.0	
CPN: -		2D Code: SOFORD_PPSD_GENERIC		A2	First Angle Projection
GMAO: -		3D Code: -			
CV/CVNS PPSD SOFORD GENERIC					
Ce dessin réalisé en CAO est la propriété de la Société DELFINGEN et ne peut être reproduit sans son accord This drawing created by CAD is the property of DELFINGEN and cannot be reproduced without prior authorisation from the source maker					

8

7

6

5

4

3

2

1